



TOUCHSCREEN BATTERY REPLACEMENT

Viper XPT-6000

Tools Required


- CR2032 Lithium Battery
- Phillips Head Screwdriver
- Flathead Screwdriver

Instructions


1. Power off and unplug the Viper.
2. Remove the cover over the electronics panel (the panel with the power input) of the Viper by removing the 14 black screws from the panel.
3. Using a flathead screwdriver, gently release the tabs holding the black plastic housing to the back of the touchscreen.



4. When tabs are released, pull the housing off of the screen.

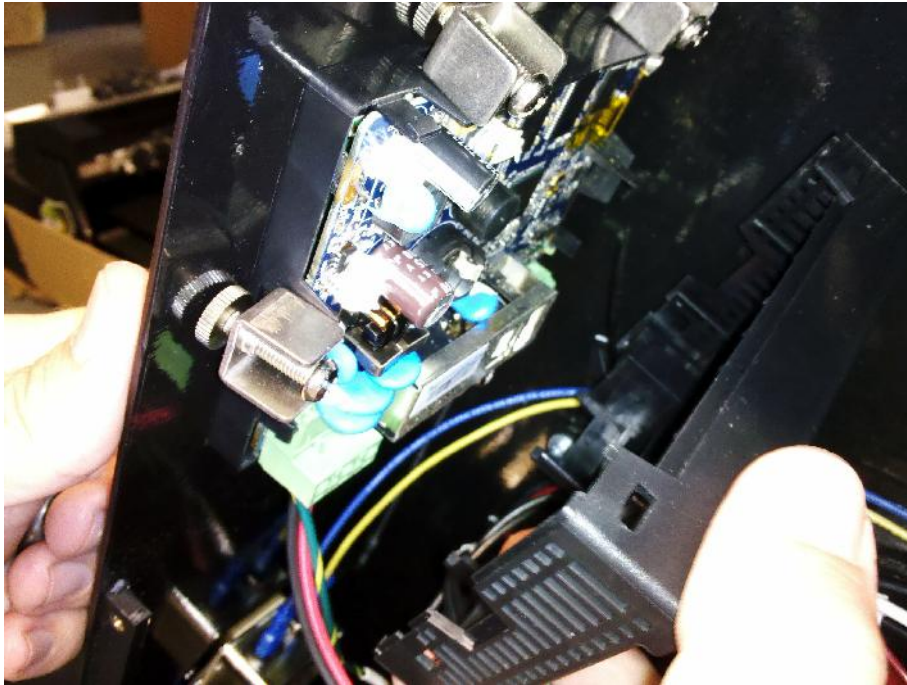

5. Using the flathead screwdriver, release the battery from it's compartment.

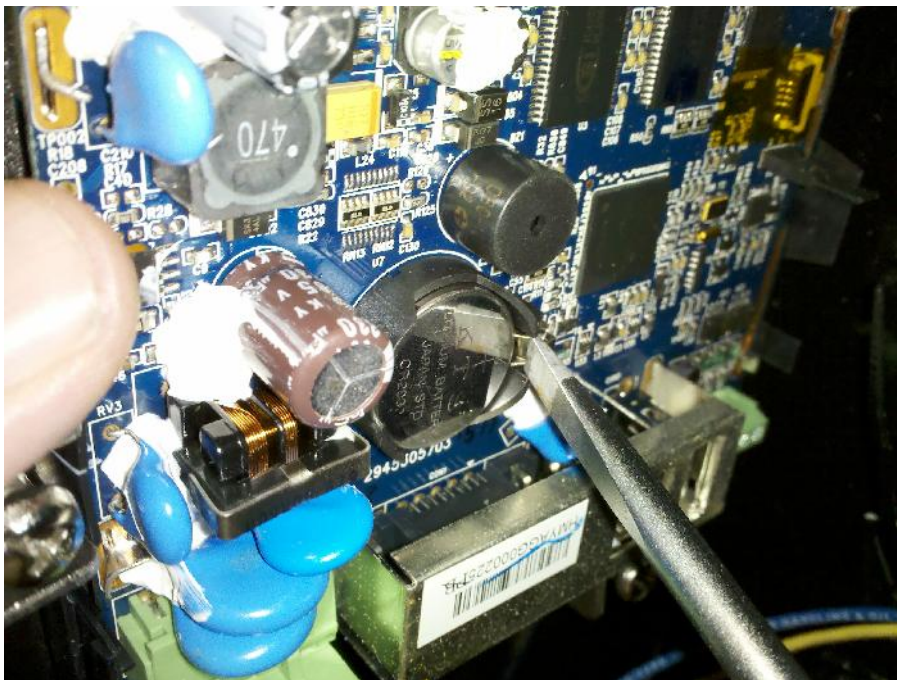

6. Insert the new battery.
7. Re-attach touchscreen housing by lining up the tabs and firmly snapping back to the screen. Reattach electronics panel cover.
8. Plug in Viper and power on. Resume normal operation.